



For help in cold-weather climates, the 750-watt engine block heater¹ helps produce proper engine lubrication at startup if used when temperatures drop below 10°F.

Diesel engine fuel tank choices

begin with the standard aluminum fuel tank (50-gal. on Regular Cab and 65-gal. on SuperCab and Crew Cab diesels) and 8-gal. DEF tank, mounted under the driver's side cab for a clean CA. Extend your diesel range with 115-gal. dual rectangular aluminum fuel tanks¹ (65-gal. right-hand tank and 50-gal. left-hand tank).

A body-builder wiring harness reduces the amount of wiring for upfitters to route.

A wide range of axle capacities gives you plenty of options in deciding which one is best for your work application. Front axle ratings on F-650/F-750 range from 8,500 to 14,000 lbs. In the rear, ratings vary from 13,500

F-650/F-750 exhaust systems vary

to 26,000 lbs.

depending on engine and routing choice, from standard horizontal mufflers to under-cab vertical switchback style. Under-cab battery box placement (adjacent to exhaust) allows for larger fuel and urea tanks without encroaching in CA area.

From single- to triple-battery setups, Motorcraft® batteries range from 750–900 cold cracking amps (CCA) depending on engine choice and model variations.

STANDARD FEATURES

Mechanical

Mechanical	
6.7L Power Stroke® V8 Turbo Diesel (3 hp/torque rating options: 270/675 [99C], 300/700 [99E] and 330/725 [99X])	
6.8L Triton® V10 3-valve gas ²	
12-volt Comstar® starting motor (diesel)	
12-volt Denso® starting motor (gas)	
8-gal. DEF tank (diesel)	
Air cleaner (gas)	
Alternator – 200-amp, extra-heavy-duty, 12-volt, Denso, brushless pad-mounted (diesel)	,
Alternator – 175-amp, extra-heavy-duty, 12-volt, Mitsubishi Electronics, brushless, pad-mounted (gas)	
Batteries – 750-amp (CCA), 12-volt, Motorcraft (2 for a total of 1,500 CCA; diesel)	
Battery – 900-amp (CCA), 12-volt, Motorcraft (gas)	
Battery box – Right-hand frame-mounted under cab step	
BorgWarner viscous fan clutch	
Brakes – Air brake system with Anti-Lock Brake System (ABS), 4-channel and hand control valve trailer brake (Tractor)	
Brakes – Bosch Hydro-Max [®] hydraulic brake system (n/a on Tractor	r)
Cold weather anti-gel diesel fuel additive (diesel)	
Donaldson [®] single element air cleaner with restriction indicator (dies	el)
Driveshaft – Dana base	
Emergency flashers – 4-way	T \
Engine coolant with red, extended-life Organic Acid Technology (OA -40°F freeze-protection rating	1)
Engine exhaust brake (diesel)	
Exhaust – Single, switchback-style, horizontal; frame-mounted righ side under cab with outside of frame rail rear discharge (diesel)	
Exhaust – Single, horizontal, catalytic converter, frame-mounted rig side back of cab; downward-facing outlet tip (gas)	
Ford TorqShift [®] HD 6-speed automatic transmission (without PTO provisi	on)
Frame-mounted body-builder wiring at back of cab (n/a on Tractor)	
Front parabolic taper-leaf springs with double-acting shock absorbe	
Fuel tank – 50-gal. single rectangular aluminum, frame-mounted or left side (Regular Cab diesel) ————————————————————————————————————	
Fuel tank – 65-gal. single rectangular aluminum, frame-mounted or left side (SuperCab and Crew Cab diesel)	
Fuel tank – 50-gal. single rectangular steel, frame-mounted on left side (Regular Cab and SuperCab gas)	
Fuel tank – 60-gal. single rectangular steel, frame-mounted on left side (Crew Cab gas)	
Fuel/water separator (diesel)	
Fuses – SAE blade-type	
Gearshift interlock key ²	
Radiator – Aluminum with in-tank transmission cooler	
Rear suspension with multi-leaf rear springs	
Wheel seals (front and rear axle), oil-lubricated wheel bearings (front and rear)	
Interior Cab Equipment	
AM/FM stereo with auxiliary audio input jack, clock and 2 speakers	
Air conditioning – Manual with integral heater and defroster	
Air registers with positive shut-off	
Assist handle on A-pillars	
Assist handle on P. pillara (Crow Cab)	

Assist handle on B-pillars (Crew Cab)

Coat hooks (2)

Cruise control with steering wheel-mounted controls looring – Black vinyl Gauge cluster with electronic speedometer (mph/kph), oil pressure, colant temperature, DEF gauge (diesel only), fuel gauge, tachometer, ndicator lights, enhanced 3-button message center with odometer, rip odometer, distance to empty for fuel, average fuel economy and varning messages Glove box at right-hand instrument panel eft-/right-hand front-window demisters Aolded cloth headliner Aultifunction, self-canceling turn signal switch (n/a on Tractor) Aultifunction, non-canceling turn signal switch (Tractor) Dil maintenance minder Powerpoints – 12-volt, located in instrument panel (2) Rear-mounted dome lamp with integral map lights (Regular Cab/Crew Cab) Scuff plates – Black molded-in-color Steering wheel – Black vinyl Sun visors - Driver and front-passenger, vinyl with passenger-side mirror Jpfitter switches (4) located in center IP with connector access located in engine compartment; includes 10-, 15- and two 25-amp switches (diesel) Exterior Cab Equipment Air/electric lines (12' coiled; Tractor) Assist handles – Rear of cab Body-builder wiring harness, back of cab at frame Bumper – Front; full-width, black Deck plate/pogo stick (Tractor) Dual-note electric horn Grille - Painted black, plastic leadlamps – Aero-type, high-series includes front side marker lamps with reflectors) lood – Frame-mounted front-end-tilting fiberglass hood and fenders assembly with torsion-bar assist (includes integrated noise shield, nner splash shields and mud flaps) amps – Roof marker/clearance, amber lenses (5) Airrors – Black, dual rectangular, manually adjustable/folding vith integrated spotter mirrors, sail-type, 96"-wide spacing Side repeat flasher aillamps (2) with integrated stop, turn signal, backup and license plate apered frame ends (Tractor) ow hooks (2) - Front, black, frame-mounted railer charge valve (Tractor) railer module – 7-pin, mounted at back of cab (Tractor) Vindow – Rear, fixed, solar-tinted Vindshield – Solar-tinted with laminated glass Vindshield wipers – 2-speed intermittent with washer

Safety & Security

Belt-Minder[®] safety belt reminder (chime and flashing warning light on instrument panel if driver's safety belt isn't buckled) Safety belts – Color-keyed with fixed D-rings at all positions (Regular Cab)³ Safety belts – Color-keyed with front-seat adjustable D-rings (SuperCab/Crew Cab)³

AVAILABLE FEATURES

Axle & Suspension – Front

EmGard® SAE 50 synthetic lubricant

Axle & Suspension – Rear

Air suspension (diesel) Air suspension dump valve (diesel) Additional air suspension leveling valve (diesel)

Double-acting shock absorbers (included with air suspension on diesel)¹ EmGard 75W-90 synthetic lubricant

Brakes & Brake Equipment

Air brake chambers – Spring-style (relocated to rear of axle; diesel; n/a on Pro Loader®) Air brake system with ABS and traction control, 4-channel (diesel)

Air brake system with ABS, 4-channel (diesel)

Air compressor – Bendix[®] Tu-Flo[®] 550 Compressor 13.2-CFM (for stand-alone air source with hydraulic brakes; included with air suspension; diesel only; n/a on Tractor)

Air dryer – Bendix AD/IP[®] with heater mounted on left frame rail back of cab (diesel)

Automatic drain valve (Bendix DV-2[™]) with heater on diesel¹ Hydraulic Brake System – Bosch[®] Hydro-Max[®] with traction control (n/a on Tractor)

Trailer Connections

4-wheel trailer Air Brake Package (includes air lines to rear of frame, hand control valve and tractor protection valve; diesel only; n/a on Tractor)¹

7-way trailer connection socket, mounted at rear of frame, for combined trailer stop/tail/turn/marker light circuits (n/a on Tractor)¹

7-way trailer connection socket, mounted at rear of frame, for separate trailer stop/tail/turn/marker light circuits (n/a on Tractor)¹

7-way trailer connection socket, mounted at rear of frame, wired for turn signals combined with stop (compatible with trailers that use combined stop/tail/turn lights; diesel only; n/a on Tractor)¹

7-way trailer connection socket, mounted at rear of frame, wired for turn signals independent to stop (compatible with trailers that have amber or side turn lights with independent stop/turn; diesel only; n/a on Tractor)¹

Fuel Tanks

55-gal. single rectangular aluminum, frame-mounted on left side (Regular Cab diesel; n/a on Pro Loader)

60-gal. single rectangular steel, frame-mounted on left side (Regular Cab and SuperCab gas)

65-gal. single rectangular aluminum, frame-mounted on left side (Regular Cab diesel)

115-gal. dual rectangular aluminum

(65-gal. right-hand tank and 50-gal. left-hand tank; diesel)

Engine Equipment

CNG/Propane Gaseous Engine Prep Package includes hardened intake valves and valve seats (gas)

Engine block heater – Phillips, 750-watt Engine idle shutdown timer with 5-, 10-, 15- and 20-minute options Manual regeneration initiation (driver interface in message center; diesel) Top Road Speed Limiter (65- and 70-mph options)

Driveline & Clutches

Driveshaft upgrade (diesel) Transmission live-drive power takeoff (PTO) provision with stationary and mobile modes²

Exhaust

Switchback single, horizontal, frame-mounted outside right rail under cab with vertical exit (diesel) Torpedo single, horizontal, frame-mounted right-side back of cab with underbody exit in front of axle (diesel)

Electrical

Alternator – 220-amp, 12-volt (diesel)

Alternator – Dual heavy-duty, 357-amp total, 12-volt (diesel) Batteries – 900 CCA, 12-volt Motorcraft®

(2 for a total of 1,800 CCA) Batteries – 900 CCA, 12-volt Motorcraft

(3 for a total of 2.700 CCA: diesel)

Batteries – Temporary mount at back of cab (dual 900 CCA or triple 900 CCA only, includes 10' of additional cable; diesel; n/a on Tractor)

Body-builder wiring to end of frame (n/a on Tractor)

Daytime running lamps

Electric, 102-decibel backup alarm

Remote-mounted jump-start stud¹ Taillamp delete

(does not omit cable to end of frame; n/a on Tractor)¹

Interior Cab Equipment

110-volt power outlet

Air conditioning delete; fresh air heater and defroster only¹ Premium AM/FM stereo/single-CD player with MP3 capability, auxiliary audio input jack, steering wheel-mounted audio controls, clock and 4 speakers

Audio Delete Package deletes radio and all associated parts (includes radio and auxiliary audio input jack covers)

Audio Prep Package deletes radio and auxiliary audio input jack, but retains all associated parts

Anti-theft system

Ford Telematics[™] powered by Telogis^{®3}

Keys - Keyed-alike1

Rear seat delete (SuperCab and Crew Cab)

Rearview mirror Remote Keyless Entry System with 2 key fobs¹

Supplemental air heater (diesel)

SYNC[®] voice-activated, in-vehicle connectivity system (includes USB port and steering wheel-mounted SYNC controls)¹ Upfitter switches (4) located in center IP with connector access located in engine compartment; includes 10-, 15-, and two 25-amp switches (gas) Voltmeter (located in message center)

Exterior Cab Equipment

Bumper – Front, full-width, chrome-plated steel

(included with Exterior Appearance Package) Bumper – Front, swept-back, painted-steel, Dark Shadow

Gray color¹

Frame reinforcement (F-750 only)¹

Front bolt-on-type frame extension, 20," without crossmember' Front bumper delete

Front stabilizer bar

Grille - Fixed, black/gray

Grille – Chrome (includes chrome headlamp bezels)

Horn – Air, black, single-trumpet, mounted on frame rail back of bumper (diesel)

Integral front frame extension – 20" in front of grille¹

Lamps – Roof marker/clearance, clear lenses (5)

Lamps – Roof marker/clearance delete

Mirrors – Black, dual rectangular, manually adjustable/ folding and heated with integrated spotter mirrors, sail-type, 96"-wide spacing¹

Mirrors – Black, dual rectangular, power-adjustable/manual folding and heated with integrated spotter mirrors, sail-type, 96"-wide spacing¹

Mirrors – Chrome caps, dual rectangular, manually adjustable/folding with integrated spotter mirrors, sail-type, 96"-wide spacing

Mirrors – Chrome caps, dual rectangular, manually adjustable/folding and heated with integrated spotter mirrors, sail-type, 96"-wide spacing¹

Mirrors – Chrome caps, dual rectangular, power-adjustable/ manual folding and heated with integrated spotter mirrors, sail-type, 96"-wide spacing¹

Mirrors – Black, dual rectangular, manually adjustable/folding with integrated spotter mirrors, sail-type, 102"-wide spacing

Mirrors – Black, dual rectangular, manually adjustable/ folding and heated with integrated spotter mirrors, sail-type, 102"-wide spacing¹

Mirrors – Black, dual rectangular, power-adjustable/manual folding and heated with integrated spotter mirrors, sail-type, 102"-wide spacing¹

Mirrors – Chrome caps, dual rectangular, manually adjustable/folding with integrated spotter mirrors, sail-type, 102"-wide spacing

Mirrors – Chrome caps, dual rectangular, manually adjustable/folding and heated with integrated spotter mirrors, sail-type, 102"-wide spacing¹

Mirrors – Chrome caps, dual rectangular, power-adjustable/ manual folding and heated with integrated spotter mirrors, sail-type, 102"-wide spacing¹

Mirrors – Trailer tow, 96"-wide spacing power-telescoping with power glass, power-folding, heated, includes manual convex integrated spotter mirrors, integrated clearance lamps and turn signal indicators¹ Mud flap holders – Rear, without flaps Mud flaps – Rear¹ Special-rating GVWR (limited to 25,999 lbs.; straight frame) Special-rating GVWR (limited to 33,000 lbs.; F-750 diesel only) Tow hooks delete Window – Rear, sliding

Packages

Ambulance Prep Package (available with 300-hp Power Stroke® V8 Turbo Diesel engine) includes special EPA calibration for emergency vehicles, 357-amp dual heavy-duty alternators, and three 900 CCA batteries for 2,700 CCA total (n/a on Tractor)

Beverage Delivery Package includes body builder wiring with 6' additional length to accommodate drop-frame beverage body application

Exterior Appearance Package includes full-width chromeplated steel front bumper and chromed fender badges

Fire/Rescue Prep Package (available with 300-hp Power Stroke V8 Turbo Diesel engine) includes special EPA calibration for emergency vehicles, 357-amp dual heavy-duty alternators, and three 900 CCA batteries for 2,700 CCA total (n/a on Tractor)

Interior Appearance Package includes front-mounted overhead console with dual sunglasses holders and front map lights, door-trim panels, map pockets, chrome air registers, 2nd-row bench seat (Crew Cab), 2nd-row flip-up seats with cushions and bolsters (SuperCab), perforated cab back panel (Regular Cab and Crew Cab) and Power Equipment Package

Power Equipment Package includes power front side windows, power rear side windows (Crew Cab), manual rear side windows (SuperCab), power door locks, and door-trim panels (included in Interior Appearance Package)

Ford Telematics powered by Telogis^{3,4}

helps you run your business efficiently, and provide drivers with feedback on the road.

Built-in, factory-installed, comprehensive diagnostic technology provides a 360° view of real-time vehicle metrics and driver behavior to help increase productivity.

An easy-to-use portal provides insights, dashboards and reports to empower fleet managers to positively transform their fleet businesses.

Mobile connectivity links workers in the field with fleet managers to coordinate Department of Transportation compliance (including hours of service and driver vehicle inspection reports), work orders and more.

TECHNICAL SPECIFICATIONS

s: Standard 0: Optional CAB OPTIONS

REGULAR CAB



SUPERCAB



CREW CAB



T alles							
Model	Frame Order 0	Code 534	535	536	537	538 ¹	539
F-650 Pro Loader® gas F-650 Pro Loader diesel F-650 gas F-650 diesel F-650 Tractor F-750 gas F-750 diesel F-750 diesel F-750 Tractor	0 0 0 				S S 	 0 0 0	
Depth (in.) Width (in.) Thickness (in.) Yield (psi) Maximum section modulus (cu. in.) Maximum resisting bending moment (inlbs.)	9.125 3.062 0.312 80,000 10.75 860,000	10.125 3.062 0.312 50,000 12.64 632,000	10.250 3.092 0.375 80,000 15.14 1,211,000	10.125 3.580 0.312 120,000 14.18 1,702,000	9.125 3.062 0.312 80,000 10.75 860,000	10.250 3.610 0.375 120,000 16.98 2,037,600	10.375 3.705 0.438 120,000 20.11 2,413,000

Axles

Frames

	Front A	xle Rati	ng (lbs.)			
Model	8,500	10,000	12,000	14,000		
F-650 Pro Loader gas F-650 Pro Loader diesel F-650 gas F-650 Tractor F-750 gas F-750 diesel F-750 Tractor	s s s 	 0 0 0 5 5 5 5 5		 0 0		
		k le Ratir 17,500	• • •	-	- Speed 23,000	26,000
F-650 Pro Loader gas F-650 Pro Loader diesel F-650 gas F-650 Tractor F-750 gas F-750 diesel F-750 Tractor	\$ 	0 0 S S S 	 0 0 	 	 0 0	
	Rear Axle Rating (lbs.) – 2-Speed 21,000					
F-750 diesel F-750 Tractor	0 0					

Suspensions

	Front Spring Rating (lbs.)							
Model	8,500	10,000	12,000	13,200	14,000			
F-650 Pro Loader gas F-650 Pro Loader diesel F-650 gas F-650 diesel F-650 Tractor F-750 gas F-750 diesel F-750 Tractor	S S S — — —	0 0 0 5 5 5 5 5 5	0 0 0 0 0 0 0		 0 0			
	Rear Mu 15,500	t i-Leaf Sj 19,000	orings Rat 21,000	t ing (lbs.) 23,000	31,000			
F-650 Pro Loader gas F-650 Pro Loader diesel F-650 gas F-650 diesel F-650 Tractor F-750 gas F-750 diesel F-750 Tractor	\$ \$ 	0 0 S S S 	0 0 0 5 5 5		 0 0			
	Rear Air Suspension Rating (lbs.)							

	12,000	19,000	21,000	23,000
F-650 Pro Loader diesel	0	0	_	_
F-650 diesel		0	0	—
F-650 Tractor		0	0	—
F-750 diesel		—	0	0
F-750 Tractor	—	—	0	0

¹Late availability.

BENDIX is a registered trademark of Honeywell International used under license by Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademark of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademark of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Comstar is a registered trademark of Comstar is a registered trademark of Comstar is a registered trademark of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercial Vehicle Systems LLC. Tu-Flo,[®] AD/IP[®] and DV-2[™] are registered trademarks of Bendix Commercia

TECHNICAL SPECIFICATIONS

S: Standard 0: Optional WHEELS

Dimensions¹

	Regular Cab (in.)	SuperCab (in.)	Crew Cab (in.)
Overall height (at curb) Width at front fenders Frame rail width Front bumper to back of cab	89.6 - 94.7 95.0 34.0 114.4		89.6 – 94.5 95.5 34.1 149.9
Load floor height (at curb) Front bumper to center of front axle Wheelbase Center of rear axle to end of frame Back of cab to center of front axle Back of cab to center of rear axle	33.1 - 39.3 40.4 146.0 - 281.0 39.0 - 120.0 74.1		33.1 - 39.2 40.4 182.0 - 278.0 39.0 - 100.0 109.5 72.0 - 168.0

Weight Ratings & Wheelbase/Cab-To-Axle Ranges

			Curb	Wheelbase/Cab-to	Options				
Model	GVWR (lbs.)	GCWR (lbs.)	Weight (lbs.)	Regular Cab	SuperCab	Crew Cab	Regular Cab	SuperCab	Crew Cab
F-650 Pro Loader [®] gas	22,000 - 26,000	37,000	8,748 - 9,527	158/84 - 242/168	179/84 - 239/144	194/84 - 254/144	5	3	3
F-650 Pro Loader diesel	20,500 - 26,000	50,000	9,407 - 11,628	158/84 - 242/168	179/84 - 239/144	194/84 - 254/144	5	3	3
F-650 gas	25,600 - 29,000	37,000	9,618 - 10,533	158/84 - 260/186	179/84 - 263/168	182/72 - 278/168	11	10	11
F-650 diesel	25,600 - 29,000	50,000	10,278 - 11,947	158/84 - 260/186	179/84 - 263/168	182/72 - 278/168	11	10	11
F-650 Tractor	27,500 - 29,000	50,000	11,062 - 11,573	146/72 - 158/84	167/72 - 179/84	182/72	2	2	1
F-750 gas	30,200 - 33,000	37,000	9,748 - 10,672	158/84 - 281/207	179/84 - 281/186	182/72 - 266/156	12	11	10
F-750 diesel	30,200 - 37,000	50,000	10,408 - 12,166	158/84 - 281/207	179/84 - 281/186	182/72 - 266/156	12	11	10
F-750 Tractor	30,200 - 37,000	50,000	11,274 - 11,785	146/72 – 158/84	167/72 – 179/84	182/72	2	2	1

Wheel Availability									
Wheel (in.)	F-650 Pro Loader Gas	F-650 Pro Loader Diesel	F-650 Gas	F-650 Diesel	F-650 Tractor	F-750 Gas	F-750 Diesel	F-750 Tractor	
19.5 x 6.75 8-lug white powder-coated steel 19.5 x 7.5 10-lug white powder-coated steel	S	S	0	0	_		_	_	
$19.5 \times 7.5 \ 10^{-1}$ lug polished aluminum ² $22.5 \times 7.5 \ 10^{-1}$ lug white powder-coated steel	_	0		0 S	<u> </u>	<u> </u>	<u> </u>	<u> </u>	
22.5×8.25 10-lug white powder-coated steel 22.5×8.25 10-lug polished aluminum ²	_	_	0	0	0	0	0	0 0	

Tire Availability

F-650 Pro Loader Gas	F-650 Pro Loader Diesel	F-650 Gas	F-650 Diesel	F-650 Tractor	F-750 Gas	F-750 Diesel	F-750 Tractor	Tire Size ³	Load Range (PR)	Steel	Aluminum
0	S	0	0	_	_	_	_	245/70R19.5G	14	0	0
S	0	0	0	<u> </u>	<u> </u>	<u> </u>	<u> </u>	245/70R19.5H	16	0	0
0	0	0	0	<u> </u>	<u> </u>	<u> </u>		265/70R19.5G	14	0	0
_	<u> </u>	S	S	S	S	S	S	11R22.5G	14	0	0
	<u> </u>	0	0	0	0	0	0	11R22.5H	16	0	0
_	<u> </u>	0	0	0	0	0	0	255/70R22.5H	16	0	0
_	<u> </u>	0	0	S	0	0	0	275/80R22.5G	14	0	0
_	<u> </u>	0	0	0	0	0	0	275/80R22.5H	16	0	0
—					0	0	0	295/80R22.5H	16	0	0



White Powder-Coated Steel 8- or 10-hole (front) – Standard

Polished Aluminum (front) – Optional

EXTERIOR & INTERIOR CHOICES




Steel Gray Cloth: Optional

Steel Gray HD Vinyl: Standard

SEATING

Standard Front		Suspension System	Position	Opti
	30% width high-back bucket with manual lumbar, integrated head restraint, fore/aft adjustment, reclining, armrest and floor-mounted mini-console	Fixed-spring	Driver	
	30% width high-back bucket with integrated head restraint, fore/aft adjustment, reclining and armrest	Fixed-spring	Passenger	
Optional Front				F
	30/70 split full-width, high- back bucket driver's seat, fore/aft adjustment and reclining; includes driver's seat manual lumbar, integrated head restraints and fold-down armrest with tray and cupholders	Fixed-spring	Driver/ 2-passenger	
	Air suspension with integral pump high-back bucket driver's seat and fixed- spring 2-passenger bench seat; includes driver's seat manual lumbar, integrated head restraints and fold- down armrest with tray and cupholders ¹	Air suspension with integral pump/fixed-spring	Driver/ 2-passenger	
	Air-ride high-back bucket driver's seat and fixed- spring 2-passenger bench seat; includes driver's seat manual lumbar, integrated head restraints and fold- down armrest with tray and cupholders ¹	Air-ride/ fixed-spring	Driver/ 2-passenger	E
	High-back bucket with integrated head restraint, fore/aft adjustment, reclining, manual lumbar and armrest	Fixed-spring	Driver	Sta
	Air suspension with integral pump high-back bucket with manual lumbar, integrated head restraint and armrest ¹	Air suspension with integral pump	Driver	
	Full air-ride high-back bucket with air lumbar, integrated head restraint and armrest ¹	Air-ride	Driver	

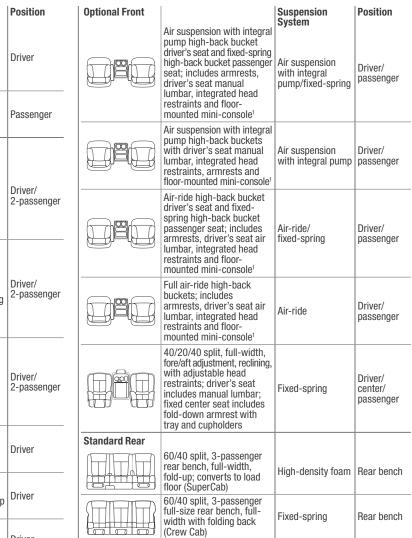



Optional 40/20/40 driver and front-passenger bucket seats

Business Preferred Network. Each of the select dealerships in our Business Preferred Network (BPN) is committed to providing quality commercial-oriented products and service, as well as special financing and billing arrangements, to businesses that rely on Ford products. As a BPN customer, your business vehicles receive priority service at your BPN dealership to help get your vehicle back on the road quickly.

Financial Services. Our commercial purchase plans and lines of credit offer attractive rates, negotiable terms and business-friendly options. If you prefer to lease, our CommerciaLeaseSM programs offer a wide variety of package options to meet your needs. For additional information, please visit our website at fordcredit.com/comlend.

Ford Protect Extended Service Plans. Whether you purchase or lease your Ford vehicle, insist on genuine Ford Protect extended service plans. Ford Protect has a variety of plans to give you peace-of-mind protection whether you want vehicle component or maintenance coverage. Plus, they are fully backed by Ford and honored at all Ford dealerships in the U.S., Canada and Mexico. When you visit your dealer, insist on genuine Ford Protect extended service plans.

Ford Original Accessories. They're warranted for whichever provides you the greatest benefit: 24 months/unlimited mileage, or the remainder of your Bumper-to-Bumper 3-year/36,000-mile New Vehicle Limited Warranty. Ford Licensed Accessories (FLA) are warranted by the accessory manufacturer's warranty. FLA are designed and developed by the accessory manufacturer and have not been designed or tested to Ford Motor Company engineering requirements. Contact your Ford Dealer for details and/or a copy of all limited warranties.

Comparisons based on competitive models (Class 6–7 Conventional Chassis Cabs based on Ford segmentation), publicly available information and Ford certification data at time of release. Vehicles may be shown with optional and aftermarket equipment. Features may be offered only in combination with other options or subject to additional ordering requirements/limitations. Dimensions and capacity ratings shown may vary due to optional features and/or production variability. Information is provided on an "as is" basis and could include technical, typographical or other errors. Ford makes no warranties, representations. or guarantees of any kind, express or implied, including but not limited to, accuracy, currency, or completeness, the operation of the information, materials, content, availability, and products. Ford reserves the right to change product specifications, pricing and equipment at any time without incurring obligations. Your Ford Dealer is the best source of the most up-to-date information on Ford vehicles. Body manufacturers are responsible for compliance certification of the completed vehicle. The Ford New Vehicle Limited Warranty and any government certification made by Ford shall cover only the vehicle as manufactured by Ford and shall not extend to any addition, modification or change of or to the vehicle by the Ford Authorized Pool Account.

¹Restrictions apply. See your dealer for details.